



TETRA-CHEM INDUSTRIES LTD.

271 INGERSOLL ST. S.
INGERSOLL, ONTARIO
CANADA N5C 3J7

TEL: (519) 485-4370
TOLL FREE: (888) 658-5515
FAX: (855) 762-4446
EMAIL: info@tetra-chem.com
WEB SITE: www.tetra-chem.com

SPECIALTY CHEMISTRY

WASTE MANAGEMENT

APPLICATION TECHNOLOGY

INNOVATIVE ENGINEERING

Product Application Presentation

Product Identifier:

TCI 1206 H.D.


Process Identifier:

Hot aqueous non-foaming multi-metal motive transmission parts cabinet jet wash (powder)

Product Presentation

TCI 1206 H.D. is a non-foaming fine granular cream coloured slightly moist and dust free powder of mild alkaline builders, food grade defoamer and biodegradable detergents incorporating special buffers, chelating agents and corrosion inhibitors.

TCI 1206 H.D. is charged to a volume of hot water 60–80°C at a rate of 20 g/L. or 160°F at a rate of 3 oz/gal.

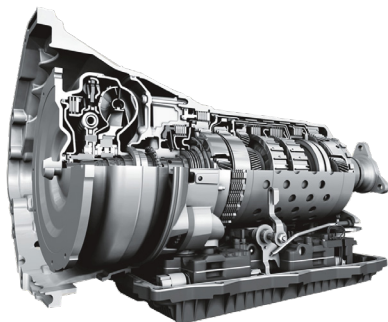

TYPICAL CABINET JET WASHER

TCI 1206 H.D.

when used according to directions will prevent **rust** and **corrosion** of all wetted parts (steam, vapor or liquid) of the steel cabinet and solution holding reservoir.

Process Specificity

Hot aqueous (60–80°C) low pressure (50–80 psi) high volume (50–80 gpm) spray cleaning of soiled aluminum, ferrous and copper metals and their alloys pertaining to automotive and industrial engines and power transmission components. Soils effectively removed through turbulence include: dirt, oil, varnish, drawing compounds, grease, carbon, metallic particles, some paints, rust, phosphate coatings, heat treat scale and smut. The metals are cleaned by emulsification, dispersion, saponification and sludge settling or a combination of these mechanisms.

The cleaning solution comes in contact with the entire surface of the part when properly placed on the rotating turntable of the jet washer to prevent shadowing. After the alkaline cleaner has affected the soil on the part, the soil is removed from the metal surface by low pressure flushing, i.e. mechanical means of solution movement.

The cleaning cycle (1–15 minutes) depends on the type of dirt and the type of parts cleaned. For normal temperature and product concentration extremely dirty parts will be clean in 15 minutes. Due to the hot cleaning process, parts dry quickly with no residual white powder residue. Use a airblow gun to remove the residual cleaning solution from pooling areas, threaded bolt holes, cracks and crevices.

Packaging & Product Codes:

25 kg.....1206-025

100 kg.....1206-100

200 kg.....1206-200

Solution Maintenance

Cleaning solution concentration is maintained through simple addition of the TCI 1206 H.D. compound. Solution strength is determined by titrating with a dilute acid to the phenolphthalein end point with **Titration Kit 1206**.

Quality control **Titration Kit 1206** is provided at no additional cost.

If a foaming problem should arise, due to saponifiable contamination, check solution strength first, and only if the solution strength and temperature are normal, add the **TCI 015 H.D.** food grade defoamer.

CAUTION: you may shut the heat off overnight or on weekends to allow the oil skimmer to remove floating protective oils and waxes that separate during cooling. The solution must be back up to 60–80°C before cleaning resumes to prevent spillage by foaming.

Solution Disposal

The clean chemical solution is biodegradable, but according to the Ontario Ministry of the Environment and Climate Change "Regulation 347", and local municipal by-laws the cleaning process may have generated a hazardous or liquid industrial waste in which case it must be: Discharged through a treatment system e.g. 3 stage interceptor; or manifested and removed by a licensed carrier and received by a licensed receiver accompanied by a Generator Registration Number; or removed by a licensed carrier and received by a licensed receiver under a service contract providing a garage license number. Contact Tetra-Chem Industries Ltd. for complete and complementary analytical tests in compliance with the regulations prior to sewer discharge.

Before



After



For industrial and institutional use only.

The information given herein is given in good faith but no warranty, expressed or implied is made.

Please call our technical support line at 1-888-658-5515 for solutions to your industry.

Copyright 2016 Tetra-Chem Industries Ltd. All rights reserved. Printed in Canada.

No part of this publication may be reproduced or distributed in any form or by any means, or stored in a database or retrieval system, without the prior written permission of the publisher.